



# PNEULITH Digital Pneumatic lithotripter

## FEATURES

Extra power for stone fragmentation precise & minimum forward movement of the probe minimizes stone flying.

Special accessories & probes for fragmentation of renal & bladder stones. Adaptors to connect the machine to central connection.

## INPUT VOLTAGE

230 Volts,

## OUTPUT PRESSURE

4kg /cm<sup>2</sup>

## AIRFLOW

30 liter/min.

## TECHNICAL SPECIFICATIONS

### Control Unit

Supply Voltage - 230 Volts A.c.

Working pressure - 1.8 to 4 kg/cm<sup>2</sup>.

Maximum input pressure - Max. 6.0 Kg/sq.cm.

Pressure Source - Pressurised Oxygen / Compressed Air

### Hand Piece

Dimensions - Dia. 24 Mm X 180 Mm.

Weight - 0.150 Gms.

### Probes

0.8 mm ,1 mm ,1.2mm for ureteroscopy

1.5 mm Bladder Stones.

2 mm renal stones.

# PNEULITH



## Digital Pneumatic lithotripter



- Digital Lithotripter in true sense
- Precise Power control through electro-Pneumatic regulator
- Automatic low pressure detection
- LCD Display with Intuitive interface
- Mono to 15 Hz frequency setting
- Customised user program possible.

## PNEULITH WORKSTATION

### FEATURES

- Oil less, noiseless compressor
- Electrical cut off switch
- Mechanical safety valve
- Powder coated trolley with wheels

Maintenance Free Design.

### INPUT VOLTAGE


230 Volts,

### OUTPUT PRESSURE

4kg /cm<sup>2</sup>

### AIRFLOW

30 liter/min.

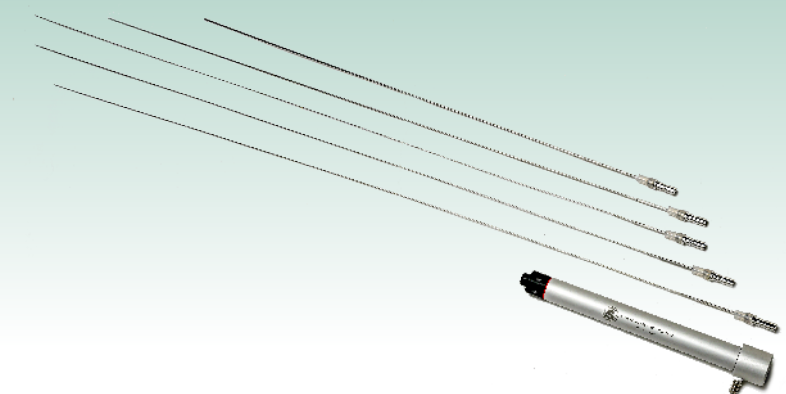

### CALCULICLAST

ASTRA 30 - HO:YAG LASER Lithotripter

URODYNAMICS


UROFLOWMETER

WORK STATION

HYDROMAT

WIRELESS UROFLOWMETER

SELF-CLEANING UROFLOWMETRY



## STATUS MEDICAL EQUIPMENTS INDIA PVT LTD

M-9/A, Additional M.I.D.C.

Satara 415004,

Maharashtra India

**Phone** 91-02162-240037

**e-mail** info@statmedi.com

[www.statmedi.com](http://www.statmedi.com)



ISO 13485:2016  
Certified Company